
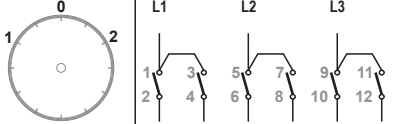






3Polos, 160Amp, Conmutadores (1-0-2)

Diagrama de conexión y dimensiones del producto

160 A 3 Faz Kutup Değiştirici Paket Şalter
160 A 3 Phase Changeover Switch

BAĞLANTI ŞEMASI CONNECTION DIAGRAM	ÇERÇEVELER FRAMES	ALT KAPAK BOTTOM COVER																					
 <table border="1" data-bbox="204 680 892 752"> <tr> <td>1</td><td>X</td><td></td><td>X</td><td></td><td>X</td><td></td></tr> <tr> <td>0</td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr> <td>2</td><td></td><td>X</td><td></td><td>X</td><td></td><td>X</td></tr> </table>	1	X		X		X		0							2		X		X		X	 STANDART ÇERÇEVE STANDARD FRAME	 ALT KAPAK BOTTOM COVER
1	X		X		X																		
0																							
2		X		X		X																	
YANDAN GÖRÜNÜŞ SIDE																							
																							
	YPT 305 160	- MUHAFAZA KUTUSU PROTECTION ENCLOSURE KOD CODE																					

PROPIEDADES TÉCNICAS

Class:	AC-23A
Corriente operativa nominal (Ie):	160Amp
Tensión nominal de aislamiento (Ui):	690V
Tensión operativa nominal (Ue):	160A. 380-440V AC / 50-60Hz
Vida eléctrica:	min. 10.000 ciclo
Posición total:	3
Estándar:	EN 60947-3
Temperatura de funcionamiento:	-20 / +60 °C
Protección de carcasa de plástico:	-



CAM SWITCH

www.opascompany.com

